
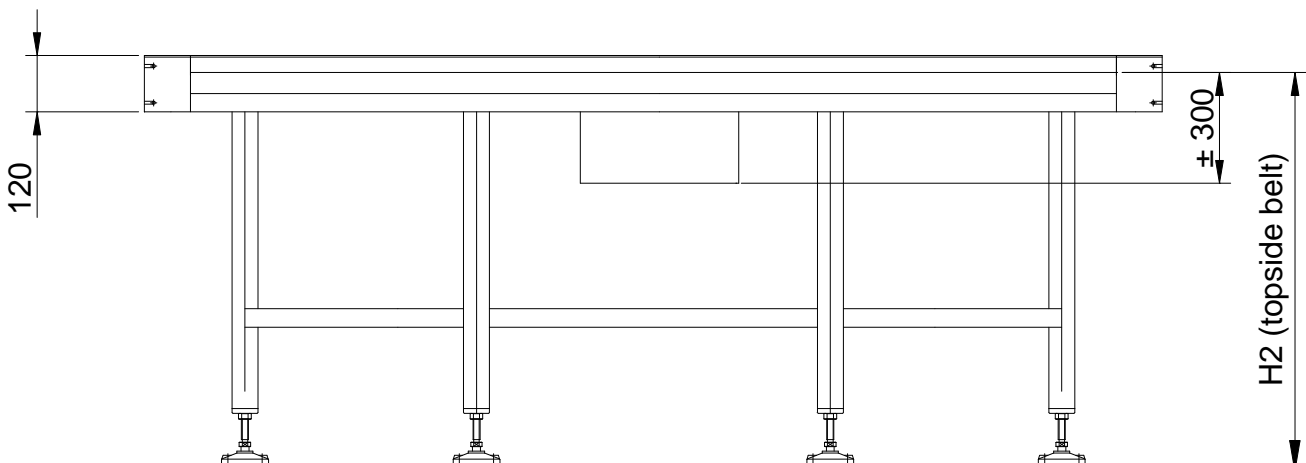


## ROUND CONVEYOR KDZ

<u>Quantity</u> :	Pce	<u>Turning direction</u>	<u>Underframe</u>
<u>Material</u> :	Steel and Aluminium	CW and CCW (reversible)	Including                      Excluding Height (H <sub>2</sub> )                      mm
<u>Angle (OR) A1</u> :	180 °	<u>Drive</u> Bonfiglioli motorreductor	adjustable ± 50 mm
<u>Outside radius</u> :	R <sub>2</sub> 500 mm		
	600 mm		
	800 mm		
	1000 mm	<u>Position of the drive</u>	<u>Client</u>
<u>Beltspeed</u> :	V                      m/min	At the outside.	
at the centre line (R <sub>3</sub> ) of the belt (max. 40 m/min).			
<u>Belt type</u> :			<u>Remark and product specifications</u>
Ropanyl EF 10/2 00+02 PVC d. green			
Ropanyl EF 10/2 0+02 M2 FG black			
Ropanyl EF 10/2 00+03 M2 FG white			
Different			
<u>Type guide roll</u> :	6KDC		

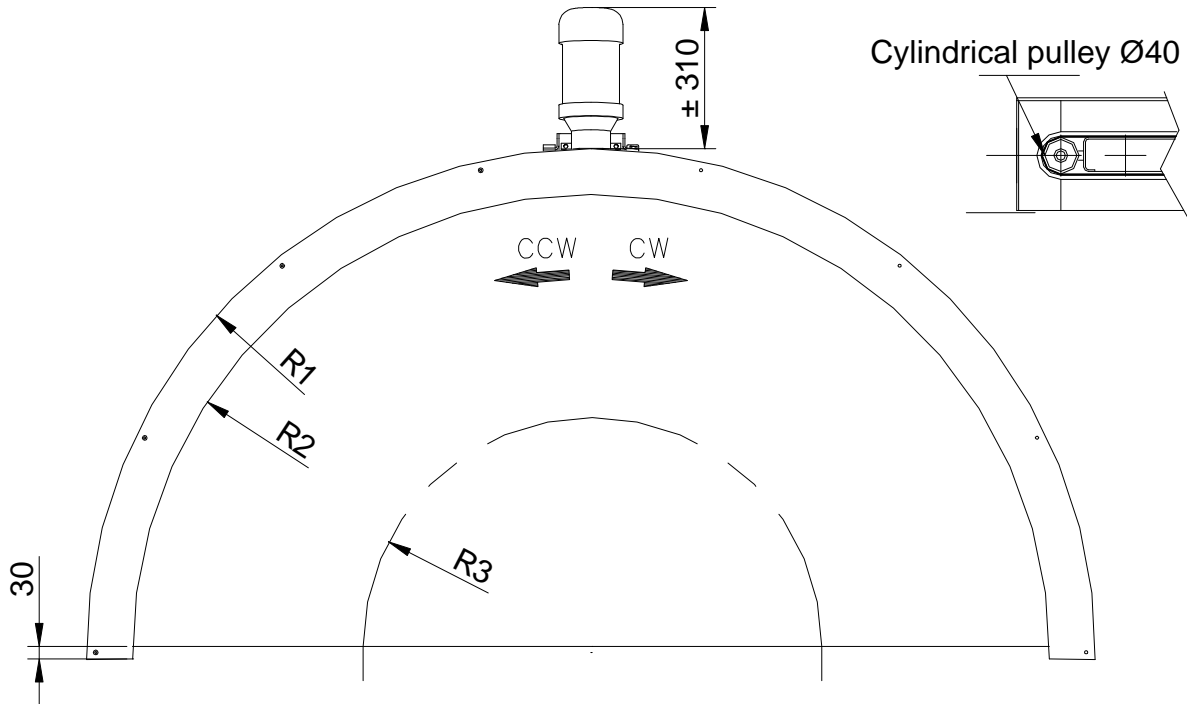

- \* If a drive is supplied, the standard version is for 230/400V-50Hz, IP54, 3Ph.
- \* When different, please indicate this under 'remark'.
- \* The drawing is not to scale; an approved sketch is binding.